

# VET-100

Most powerful compact portable X-ray



- High-performance capacitor for stable and reliable power supply
- Clear durable light technology due to LED collimator
- Flat operation touch panel with LCD display
- Constant X-ray output without influence of line power fluctuation
- Equipped with anatomic programme with 750 pre-set technique slots (PROM memory)

## Specifications

Model		VET-100
Output	Tube vol./current	110 kV/ 100 mA
	Voltage range	40 - 110 kV, 1 kV step
	mAs range	0,1 - 100 mAs, 40 steps
	Max. output	5,0 kW@75 kV
X-ray tube	Application	CEI OX 110-15
	Focal spot	1,8 mm
	HU capacity	76 kHU
	Cooling rate	57 kW/s
Collimator	Min. light field	5 cm x 5 cm@1 m SID
	Max. light field	35 cm x 35 cm@65 cm SID
	Lamp	LED
	Auto timer	30 sec
	SID scale length	2 m
	Laser pointer	Dual Laser
Power	Input	100 - 240 VAC (Free-Voltage)
	Frequency / phase	50 / 60 Hz, single phase
	Voltage compensation	± 10 %
Control Panel	7 - segment LED read - out reversible, Hand switch remote control function Digital LED display: mAs & KV Remote control software & PROM Programmable pre - set technique Data storage & store button LED indicator: ready & exp. wait	
Weight	19,6 kg	
Dimensions (WxHxL)	254 x 225 x 423	
Special features	750 APR	

## Optional Accessories

PXMS - 2010




Veterinary X-ray Table TKF



Standard Accessory Carrying Case



## Dimensions (mm)

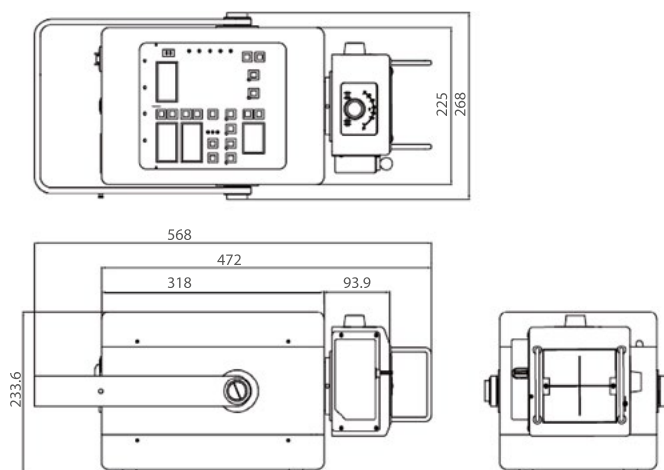

Im Erlengrund 20, 46149 Oberhausen - Germany

t: +49 (0) 208 377 890-0 info@medical-econet.com  
 f: +49 (0) 208 377 890-55 www.medical-econet.com  
 facebook.com/medicaleconetgermany  
 twitter.com/medicaleconet

CE 0123

**WOLVERSON XRAY**  
 Imaging excellence  
 Willenhall Business Park,  
 Walsall Street, Willenhall, West Midlands, WV13 2DY  
 T: 01902 637333  
 E: enquiries@wolversonx-ray.co.uk  
 W: www.wolverson.uk.com

\*Changes and errors without notice.

ME-ENG-V2S-OEMVET20-02-18